


SPL-POE-1-2

PoE Extender / Splitter

This PoE Extender can be used in conjunction with a High PoE Midspan Injector or PoE+ Switch to power devices well beyond the normal 100m PoE distance limit.

Two of these units can be used in series, giving a maximum range of 300m.

These are ideal for IP cameras, access control devices, and anything else outside the reach of normal PoE. It can also be used to add a secondary camera off the same cable.

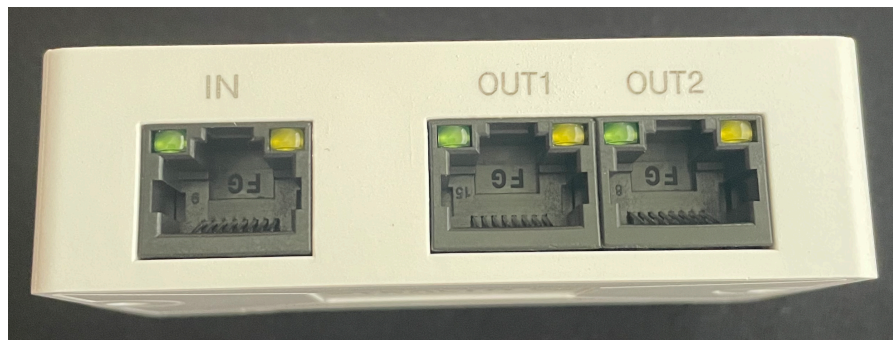

FEATURES

- > Splits one PoE port into two
- > Supports auto-negotiation and 10/100Mbps
- > 300m maximum transmission distance (requires two units)
- > 8W of power available at the remote end.
- > DIN Rail mountable

INFORMATION

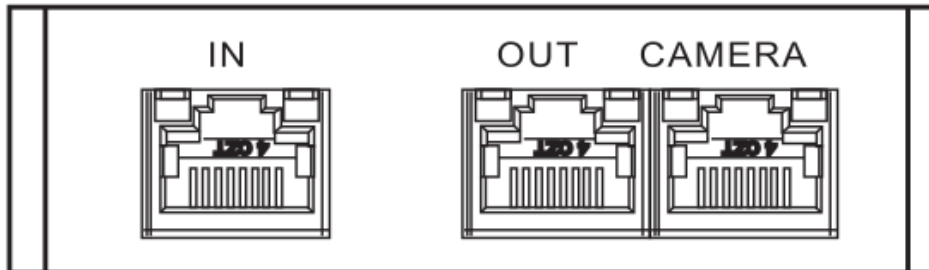


Figure2-1

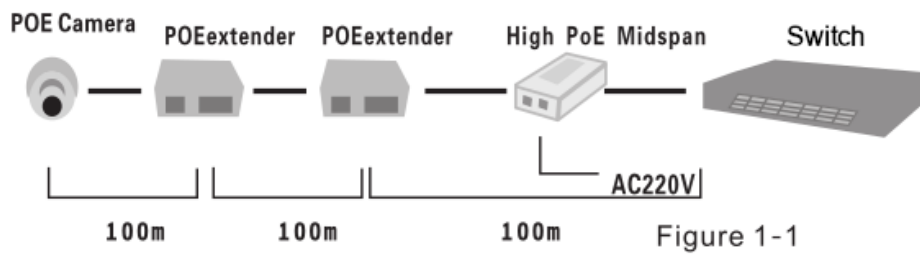


Figure 1-1

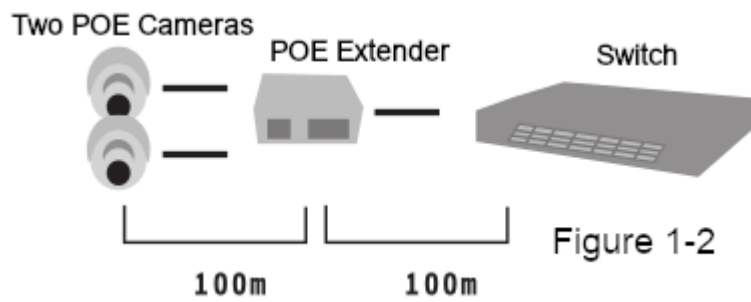


Figure 1-2

SPECIFICATIONS

ETHERNET	
Standards:	802.af 802.at
Speed	10/100Mbps
Packet Buffer:	48K byte
MAC Address Table:	2000
Connector:	3x RJ45
ENVIRONMENTAL	
Operating Temperature:	0°C-60°C
Storage Temperature:	10°C-70°C
Relative Humidity:	5% -90%, no condensation
PHYSICAL	
Power Consumption:	1W
Dimensions (WxDxH):	24x53x79mm
Weight:	52g
Casing:	Plastic
Mounting Options:	DIN Rail or Screw